

## 4U 24HDD 128CH 4K H.265 NVR




### FEATURES

- Access to IP cameras of I8H, ONVIF standards and a number of mainstream manufacturers;
- Support GB28181 protocol, ONVIF protocol access platform; Support AEeye cloud service, can be a key to configure the Internet;
- Support 4K HD video preview, storage and playback;
- No need IPC support, can operate functions like cross-border, entry area, departure area, zone intrusion items left / take, target count, virtual warning line;
- Support AEVISION SMART IPC cross-border, wandering, face, license plate, audio, input exception, virtual coke and scene changes and other intelligent detection access and linkage;
- Supports the instant playback function to play back the current recording of the specified channel under the preview screen and does not affect other channel previews.
- 24 x SATA + 1 x eSATA hard disk port

### DIMENSION

Unit: mm

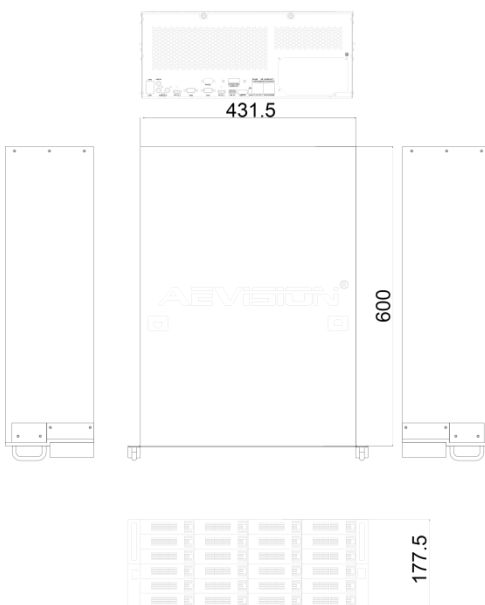

<b>MODEL</b>	<b>AP-21824128</b>	
<b>Classification</b>	<b>Parameters</b>	<b>Parameter Values</b>
<b>Video / Audio Input</b>	Network Video Input	128ch network compressed video input (compatible with 4K with 4K resolution)
	Bandwidth	640M
	Audio Input	IPC composite audio input
<b>Video / Audio Output</b>	HDMI Output	2ch HDMI, 2ch VGA, Resolution: 3840×2160/30Hz, 1920×1080/60Hz
	Audio Output	1ch RCA
<b>Video / Audio Codec</b>	Video Format	H.265/H.264 /MJPEG
	Video Resolution	8M/5M/3M/1080P/720P
	Decode Playback	Max Support 16ch 1080P Playback
<b>Video Management</b>	Video / Capture Mode	Manual recording, video recording, event recording, moving detection, video recording, alarm recording, dynamic test or alarm recording, dynamic test and alarm recording
	Playback Mode	On time playback, regular playback, event playback, external file playback, log playback
	Backup Mode	Regular backup, event backup, video clip backup
<b>HDD</b>	Type	24x SATA+1x eSATA HDD port
	Maximum Capacity	Each port supports MAX 8TB HDD
<b>External Ports</b>	Network Port	2. RJ45 10M/100M/1000M self-adaptive LAN port
	USB Port	3. 2x USB2.0 front port, 1x USB3.0 rear port
	Serial Port	RS-485
	Alarm Input	16ch alarm input, low level active, green terminal port
	Alarm Output	8ch alarm output, relay contact (1A@24VDC), NO、NC programmable
<b>Network Management</b>	Network Protocol	ONVIF (support version 2.4), IPv4, UPnP (plug and play), NTP (network school time), SADP (automatic search IP address), PPPoE (dial-up Internet), DHCP (automatic access to IP addresses), etc.
<b>Others</b>	Power Supply	ATX110-220V 400W 50-60Hz
	Power Consumption	≤50W (without HDD)
	Working Temperature	-10°C ~ +55°C
	Operating Humidity	10% ~ 90%
	Dimension	Equipment : 431.5mm×600mm×177.5mm Packing : 720mmX545mmX280mm
	Weight	N.W: 23KG (without HDD)
	Outside Carton	1pc/Carton; Dimension: 752mmX577mmX312mm
	Installation Way	Desktop installation